

# TAGLIO C2/4 SERIES: CASTELLI FORNI OVENS



Standard Taglio C2/4 Model



Approved by the Associazione Pizzerie Italiane

## **IOB NAME:**

**REFERENCE INVOICE #:** 

#### CUSTOM FACADE: Q YES CUSTOM FACADE DOCUMENT #:

#### **FEATURES**

The Castelli Taglio C2/4 is a hand-built electric pizza oven designed and manufactured in Rome, Italy. The oven features two vertically-stacked chambers that measure 24.4" wide and 41.3" deep. In the standard model, the top chamber measures 4.75" tall and the bottom chamber measures 7" tall.

Each chamber is heated by hand-built nickel chromium resistors in the floor and ceiling. Steel doors attached by a bottom hinge protect the chambers from exposure and provide insulation during operation. The


oven exterior and interior is finished in 300 and 400 series stainless steel.

Each oven chamber is managed independently by a unique set of electromechanical controls. Set the desired baking temperature for each chamber separately.

The chambers vent to a connected chimney with a final exhaust connection on the oven roof. An integrated exhaust hood on the front of the oven collects any vapors released when opening a baking chamber door.

Custom voltages, steel facade patterns, and other information is available on www.fierogroup.com


#### **CUSTOM EXTERIOR**

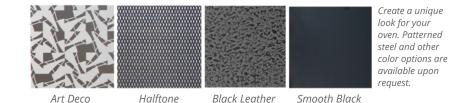

Art Deco

Halftone

Smooth Black

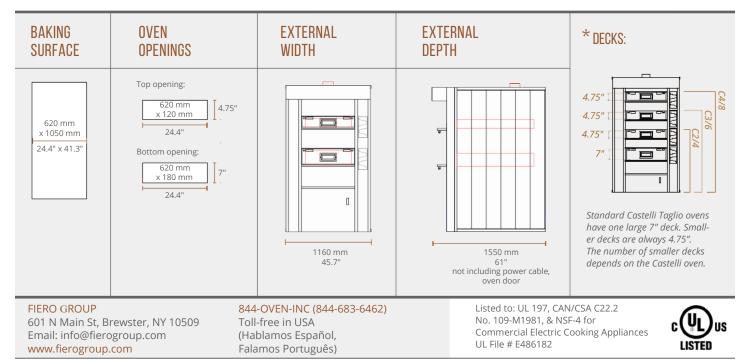

REVISED WINTER 2018. As products continue to improve, spec sheets may change without notice. Please call Fiero Group for the latest specification sheet and for further details.



Castellu

### **DETAILED SPECS**

WEIGHT: 1215 LBS

We make every effort to provide accurate information regarding manufacturer's reported dimension information. Please note that due to the artisan nature of the manufacturing process, from time to time, product sizing and ship weight may vary slightly.


> RIGHT **ELEVATION**

> > 늏

S

52

30

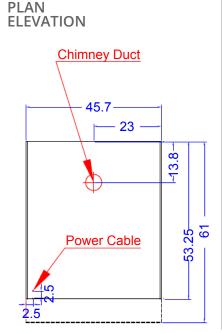


### VENTILATION REQUIREMENTS

Vent the Taglio C2/4 oven in accordance with NFPA 96 and local code.

Chimney Connection: 4" ø

#### WARRANTY INFORMATION

1 year limited warranty on electrical and other components. See warranty document for details.

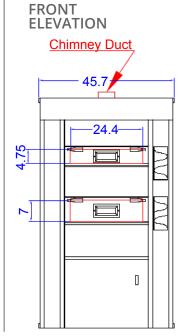

### ELECTRICAL REOUIREMENTS

- 3-phase connection
- 208V (220-240V available via special order)
- 38.9A
- 4-14 Kw

#### **OVEN PRODUCTION**

**ROMAN PIZZA CAPACITY:** 4 STANDARD PANS TEMPERATURE RANGE: 500°F - 750°F DAILY PREHEAT TIME: 2 HOURS

# **CLEARANCES**

To reduce the risk of fire, the appliance is to be installed in non-combustible surroundings only, with no combustible material within 18 inches of the sides, front, or rear of the appliance or within 40 inches above the appliance.

53.25

Chimney Duct

61

41

The appliance is to be mounted on floors of noncombustible construction with noncombustible flooring and surface finish and with no combustible material against the underside, or on noncombustible slabs or arches that have no combustible ,material against the underside. Such construction shall in all cases extend not less than 12 inches beyond the equipment on all sides.

# FIERO GROUP

601 N Main St, Brewster, NY 10509 Email: info@fierogroup.com www.fierogroup.com

844-OVEN-INC (844-683-6462) Toll-free in USA (Hablamos Español, Falamos Português)

Listed to: UL 197, CAN/CSA C22.2 No. 109-M1981, & NSF-4 for Commercial Electric Cooking Appliances UL File # E486182



79.5 77.5

DOC#: TAGLIO-C2/4-0112018-1

REVISED WINTER 2018. As products continue to improve, spec sheets may change without notice. Please call Fiero Group for the latest specification sheet and for further details.

MADE IN ITALY